

National Border Agency Communication Behaviour Clustering Using Centrality and Meanshift

by Apmd Lumbung Desa

Submission date: 13-Nov-2023 09:22PM (UTC+0700)

Submission ID: 2226705145

File name: nication_Behaviour_Clustering_Using_Centrality_and_Meanshift.pdf (249.96K)

Word count: 3150

Character count: 17979

7

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/329840045>

National Border Agency Communication Behaviour Clustering Using Centrality and Meanshift

Conference Paper · October 2018

DOI: 10.1109/INCAE.2018.8579384

CITATIONS

0

READS

72

3 authors:



Sari Armiati

Politeknik Pos Indonesia

9 PUBLICATIONS 8 CITATIONS

SEE PROFILE



Rolly Maulana Awangga

Politeknik Pos Indonesia

31 PUBLICATIONS 70 CITATIONS

SEE PROFILE



14

Acji SURADJI Muhammad

Universitas Maritim Raja Ali Haji

22 PUBLICATIONS 1 CITATION

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Diskusi Perbatasan [View project](#)



Machine Learning [View project](#)

National Border Agency Communication Behaviour Clustering Using Centrality and Meanshift

Sari Armiati
Diploma Program of Informatics
Management
Politeknik Pos Indonesia
Bandung, Indonesia
sariarmiati@poltekpos.ac.id

Rolly Maulana Awangga
Applied Bachelor Program of Informatics
Engineering
Politeknik Pos Indonesia
Bandung, Indonesia
awangga@poltekpos.ac.id

Adji Suradji Muhammad
Faculty of Social and Political Science
Universitas Maritim Raja Ali Haji
Tanjungpinang, Indonesia
suradji@umrah.ac.id

Abstract—Indonesia is Island Based Country with 1.905 million kilometers per square area. This territory area watching by National Border Agencies consists of a collaboration of many departments and government organization to make Indonesia strengthening the border. Indonesia has 6 neighboured country, Singapore, Malaysia, Philippine, Australia, Papua New Guinea, and Timor Leste. In Kepulauan Riau, have a direct border with Malaysia, Singapore, Vietnam, and Kamboja. This issue makes Kepulauan Riau have particular National Border Agencies from many Government Institution. In this research, conduct communication analysis between government Institution to run the task as National Border Agencies. The Analysis using Centrality from communication pattern in every institution. The centrality data clustering with meanshift to get a cluster of communication National Border Agencies.

Index Terms—Social Network Analysis, Centrality, Meanshift, Clustering

I. INTRODUCTION

Kepulauan Riau has four direct borders with other Country. This issue makes Kepulauan Riau strategic Province build special task force for National Border Agencies. Indonesia Government assembling Badan Pengelola Perbatasan in Kepulauan Riau to watch the border from many possibilities of a disturbing problem with other countries.

Decree of the President of the Republic of Indonesia Number 78 the Year 2005 on Management of Small Outlying Islands which states that there are 19 small outermost islands in Riau Islands Province. Malaysia, Singapore, Vietnam, and Cambodia have a direct border to the 19 outermost islands in 5 districts/cities. BPP Kepulauan Riau itself has compiled the document of Strategic Plan of Border Management Board of Kepulauan Riau Province 2010-2015. In the document, BPP Riau Islands Province has identified various problems that exist in Riau Islands Province, whether related to cross-border issues to national insight issues. Related to the problem of "weak government institution in managing border area". BPP Kepulauan Riau has also conducted inventory of the problem

into 3 (three) main issues namely; 1) The issue of border areas has not been a priority development agenda that is handled comprehensively and integrated; 2) Increased illegal activities in border areas, and 3) Weak law enforcement against illegal loggers, smuggling of goods, human trafficking, piracy and piracy, smuggling of weapons, human smuggling (such as power smuggling work, baby trade, and trafficking), as well as fish theft, especially in the gray area.

Various problems above should be solved or minimized if between parties who have authority in managing the border are synergized and even collaborate with each other. Planning as a starting point in collaborating on programs and activities related to border governance between countries is not visible. This issue reflected in the long-term planning (blueprint) act as a reference in managing the border, but not every Agency has participated in it. Head of Karimun Regency Border Management Agency, Suwedi conveys as follows; "The existing Blueprint is currently formulated unilaterally by BNPP without involving other border managers such as the Border Management Agency in the regions and the Marine Security Agency, the Indonesian Armed Forces (TNI) and the Police as well as the communities in the border areas".

The above problems should be easily solved by Collaborative approach among state institutions as stipulated in Presidential Regulation No. 12 of 2010 on National Border Management Agency and reinforced by Law No. 23 of 2014 on Regional Government. With the availability of regulations that enable cross-stakeholder engagement at both the central and regional levels, it is expected that the existing problems in the border areas can be effectively resolved.

Analyzing communication behavior between National Border Agencies in Kepulauan Riau is crucial to help with this issue. This research is conducted Communication Behavioral modeling for National Border Agencies(BPP) in Kepulauan Riau. The study uses centrality as part of social network analysis and using meanshift for clustering.

II. RELATED WORKS

Communication behaviour analysis spreading widely in aspect of technology. VoIP user level Communication Behaviour using statistical model from user communication [1]. Human behaviour using mobile data gives network human communication pattern [2]. User behaviour on E-mail communication producing pathological behaviour by using social network analysis [3]. In the International Engineering Project, research about communication over different culture also conducting between Chinese and South African [4]. On the Aerospace field, Pilot Communication behavioural data gathered to predict pilot flight operation [5]. On personal communication behaviour, data mining was used to detect user anomalies [6] and SMS Spammer [7]. To prevent terrorisms use psychologically warning behaviour using written communication [8]. Study in User behaviour on social network sharing activities gives pattern of characteristics of communication [9]. In the team communication behaviours, the study presenting optimal communication inside 5 m [10]. The study applies the Ontology method where the ontology is a theory about the meaning of an object, the property of an object, and the object relation that might occur in a knowledge domain. Ontology is an explanation of a concept and has a relationship or connection from a particular science [11] [12].

Centrality algorithm conducting Identifying Influential Spreader [13], Influential on Network Coverage [14], overlapping Community [15], disaster vulnerability [16], scientific social networks [17], also for searching promising researcher [18]. The Research use meanshift for tracking method [19] [20] [21], clustering for Trend Analysis [22], and image processing [23] [24]. In this study conduct communication behaviour clustering using centrality and meanshift to provide characteristic type on Indonesian Border Agencies.

III. METHODS

A. Centrality

Centrality was used for analysing node and vertices in the graph. In this research use degree centrality, betweenness centrality and also Closeness Centrality. Degrees Centrality measure how the nodes influence to others using sum of neighbor nodes [25]. Betweenness centrality measure path from other network to another so the path and node bridge it, is a important node [26]. Closeness Centrality calculate geodesic distance: This distance bridging other network for an active [27]. Centrality is a measure at the node level whereas centralization is a measure within the network level. Four measures of centrality that are widely used in network analysis, namely: degree of centrality, closeness, betweenness, and eigenvector centrality. The degree of centrality is defined as the number of incident links on a node. Closeness Centrality or proximity between nodes is the shortest distance to other nodes. For example in the selection of suitable locations for malls / supermarkets in a city with the aim of minimizing the distance of consumers. This size describes the proximity

of this node to other nodes. The closer it shows the more connected one institution with other institutions.

Betweenness Centrality marks the importance of the node based on the number of shortest paths through it. If there are two adjacent nodes, i.e. V and W, want to interact and node U is on the path of the relationship between V and W, then U has control over the interaction of both and betweenness measure the control. If U are on the path of some interactions then U is an important or influential node. Degree centrality, which is a measure to give sum of number connected to the nodes connected.

B. Meanshift

Starting with the data. Mean-shift work to cluster the data input by using bandwidth. The data clustered using bandwidth length and make a centroid as an object. Tracking moving objects or object tracking is a process of following the position of objects in an image. The mean-shift algorithm is one of the object tracking algorithms that is often used in the process of tracking. Mean-shift is a cluster algorithm using for improve detection [21].

The mean-shift algorithm is an effective and fast non-parametric algorithm, but it has not been able to follow an object that changes in size and changes in orientation. In this research, the development of the classical mean-shift method is capable of handling the tracking of objects that have changed the scale and orientation. With the weight of the image coming from the target object and the target candidate, the object can represent the possibility of the area being the target object. The object tracking uses a mean-shift algorithm using a zero or first moment and to one of the image weights.

The average shift method classifies internal data. Its search mode directs and moves data to the point area along with iterations a data environment that is built with the Gaussian Kernel. The Gaussian kernel is different multivariate kernel function is used for actual calculations in assumptions. Bandwidth is a free parameter which shows the effect on the estimated density produced [28].

IV. EXPERIMENT AND RESULT

Dataset gathers from two methods, secondary and primary method. Primary method gather from survey and observation using online Google form in several Government Border Agency. Moreover, interview was used in this process to get the depth of data. Secondary data consisting document and archive. The document such as MoU, Rules and Government Law. The graph in Figure 1 shows Government Agency as nodes and edges as communication between them. The list of this node shows in Table I.

A. Centrality Result

After designing Communication Behavior graph of National Border Agency in Figure 1. The Centrality can be conduct in Figure 1 graph. Using Degree Centrality, Betweenness Centrality and Closeness Centrality. The result is showing in the table I.

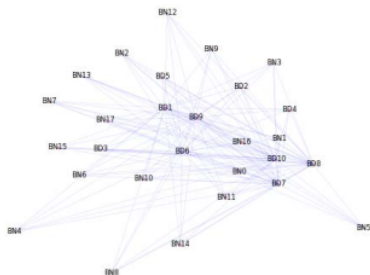


Fig. 1. National Border Agencies Pattern in Communication Behavior

B. Meanshift Result

The result for clustering degree centrality and betweenness centrality get maksimum bandwidth 0.3 for one centroid shows in Figure 2. The result for clustering degree centrality and




Fig. 2. Meanshift Result on Degree Centrality and Betweenness Centrality

closeness Centrality get maximum bandwidth for one centroid is 0.4 shows in figure 3. The result for clustering betweenness




Fig. 3. Meanshift Result on Degree Centrality and Closeness Centrality

Centrality and closeness centrality get maximum bandwidth 0.2 for one centroid shows in figure 4.




Fig. 4. Meanshift Result on Betweenness Centrality and Closeness Centrality

The result of Meanshift from Figure 2, Figure 3, and Figure 4 shows that various of data Bandwidth. The lowest bandwidth in Betweenness Centrality and Closeness Centrality(BCCC). The highest bandwidth in Degree Centrality and Closeness Centrality(DCCC). That means the communication behavior

TABLE I
CENTRALITY RESULT

Division	Centrality		
	Degree	Betweenness	Closeness
BD1	1	0,10968661	1
BD10	1	0,10968661	1
BD2	0,22222222	0	0,5625
BD3	0,22222222	0	0,5625
BD4	0,22222222	0	0,5625
BD5	0,22222222	0	0,5625
BD6	1	0,10968661	1
BD7	1	0,10968661	1
BD8	1	0,10968661	1
BD9	1	0,10968661	1
12	0,22222222	0	0,5625
BN1	0,22222222	0	0,5625
BN10	0,22222222	0	0,5625
BN11	0,22222222	0	0,5625
BN12	0,22222222	0	0,5625
BN13	0,22222222	0	0,5625
BN14	0,22222222	0	0,5625
BN15	0,22222222	0	0,5625
BN16	0,22222222	0	0,5625
13	0,22222222	0	0,5625
BN2	0,22222222	0	0,5625
BN3	0,22222222	0	0,5625
BN4	0,22222222	0	0,5625
BN5	0,22222222	0	0,5625
BN6	0,22222222	0	0,5625
BN7	0,22222222	0	0,5625
BN8	0,22222222	0	0,5625
BN9	0,22222222	0	0,5625

^aCentrality.

between National Border Agency have shortest path behavior communication not one to many communication. Shortest path behavior in communication is effective for cost reduce.

V. DISCUSSION

The result showing that using centrality in National Border Agencies can be deployed and meet the calculation. The value is varied and several division has same result. The impact of this several number is in clustering result. Meanshift calculation shows to get in one centroid, there a maximum bandwidth. The maximum bandwidth is an approach in this research to get a model of Communication Behavior. Degree centrality and betweenness centrality has 0.3 maximum bandwidth. Degree centrality and closeness centrality has 0.4 for maximum bandwidth. Betweenness Centrality and Closeness Centrality has 0.2 for maximum bandwidth. This approach can be develop in many ways of Social Network Analysis paradigm.

REFERENCES

- [1] S. Batthalla, M. Swarnkar, N. Hubballi, and M. Natu, "Voip profiler: Profiling voice over ip user communication behavior," in *Availability, Reliability and Security (ARES), 2016 11th International Conference on*. IEEE, 2016, pp. 312–320.
- [2] S. Shi, W. Wang, X. Liu, and J. Li, "Multi-scale analysis of human behavior patterns of communication based on large scale mobile data," in *Big Data Analysis (ICBDA), 2017 IEEE 2nd International Conference on*. IEEE, 2017, pp. 796–800.
- [3] M. Negnevitsky, M. J.-H. Lim, and J. Hartnett, "Analysis of e-mail communication activities for detecting patterns of pathological behaviour."
- [4] D. Jiang and L. Pretorius, "Communication behaviour in international engineering projects: An empirical and comparative study between south africa and china," in *Technology Management for Global Economic Growth (PICMET), 2010 Proceedings of PICMET'10*. IEEE, 2010, pp. 1–8.
- [5] C.-G. Oh, "Naturalistic flying study as a method of collecting pilot communication behavior data," in *Cognitive Communications for Aerospace Applications Workshop (CCAA), 2017*. IEEE, 2017, pp. 1–4.
- [6] Q. Li and P. Liu, "Detecting user behavior anomalies in communication networks," in *Cloud Computing and Big Data Analysis (ICCCBDA), 2017 IEEE 2nd International Conference on*. IEEE, 2017, pp. 384–388.
- [7] Z. Bin, Z. Gang, F. Yunbo, Z. Xiaolu, J. Weiqiang, D. Jing, and G. Jiafeng, "Behavior analysis based sms spammer detection in mobile communication networks," in *Data Science in Cyberspace (DSC), IEEE International Conference on*. IEEE, 2016, pp. 538–543.
- [8] L. Kaati, A. Shrestha, and T. Sardella, "Identifying warning behaviors of violent lone offenders in written communication," in *Data Mining Workshops (ICDMW), 2016 IEEE 16th International Conference on*. IEEE, 2016, pp. 1053–1060.
- [9] T. Hayashi, Y. Wang, Y. Kawai, and K. Sumiya, "An active communication mechanism for e-learning by analyzing sns user behavior," in *Consumer Electronics, 2016 IEEE 5th Global Conference on*. IEEE, 2016, pp. 1–3.
- [10] M. Demir, N. J. McNeese, and N. J. Cooke, "Team communication behaviors of the human-automation teaming," in *Cognitive Methods in Situation Awareness and Decision Support (CogSIMA), 2016 IEEE International Multi-Disciplinary Conference on*. IEEE, 2016, pp. 28–34.
- [11] R. M. Awangga, S. Assegaff, S. F. Pane, and M. F. Kahfi, "Ontology design of family planning field officer (plkb) for national population and family planning agency (bkkbn) using web ontology language and rdf (resource description framework)," *TELKOMNIKA (Telecommunication Computing Electronics and Control)*, vol. 17, no. 1, 2018.
- [12] R. M. Awangga, M. Yusril, and H. Setyawan, "Ontology design of influential people identification using centrality," in *Journal of Physics: Conference Series*, vol. 1007, no. 1. IOP Publishing, 2018, p. 012012.
- [13] P. Basaras, G. Iosifidis, D. Katsaros, and L. Tassioulas, "Identifying influential spreaders in complex multilayer networks: A centrality perspective," *IEEE Transactions on Network Science and Engineering*, 2017.
- [14] Y.-L. Lin and F. K. H. Phoa, "Dominating centrality set: A new measure on the network coverage of influential center nodes," in *2017 6th IIAI International Congress on Advanced Applied Informatics (IIAI-AAI)*. IEEE, 2017, pp. 138–141.
- [15] X. Wang, G. Liu, and J. Li, "Overlapping community detection based on structural centrality in complex networks," *IEEE Access*, 2017.
- [16] F. Iqbal and F. Kuipers, "On centrality-related disaster vulnerability of network regions," in *Resilient Networks Design and Modeling (RNDM), 2017 9th International Workshop on*. IEEE, 2017, pp. 1–6.
- [17] V. Ströele, F. Campos, J. M. N. David, R. Braga, A. Abdalla, P. I. Lancellotta, G. Zimbrão, and J. Souza, "Data abstraction and centrality measures to scientific social network analysis," in *Computer Supported Cooperative Work in Design (CSCWD), 2017 IEEE 21st International Conference on*. IEEE, 2017, pp. 281–286.
- [18] M. Fujita, H. Inoue, and T. Terano, "Searching promising researchers through network centrality measures of co-author networks of technical papers," in *Computer Software and Applications Conference (COMPSAC), 2017 IEEE 41st Annual*, vol. 2. IEEE, 2017, pp. 615–618.
- [19] G. Phadke, R. Velmurugan, and S. Dawande, "Non-negative matrix factorization based illumination robust meanshift tracking," in *Communications (NCC), 2017 Twenty-third National Conference on*. IEEE, 2017, pp. 1–6.
- [20] Y. Cheng, W. Hongyu, and W. Xiaohong, "Positioning method research for unmanned aerial vehicles based on meanshift tracking algorithm," in *Control And Decision Conference (CCDC), 2017 29th Chinese*. IEEE, 2017, pp. 989–994.
- [21] W. G. Aguilar, M. A. Luna, J. F. Moya, V. Abad, H. Parra, and H. Ruiz, "Pedestrian detection for uavs using cascade classifiers with meanshift," in *Semantic Computing (ICSC), 2017 IEEE 11th International Conference on*. IEEE, 2017, pp. 509–514.
- [22] S. El Ferchichi, S. Zidl, K. Laabidi, M. Ksouri, and S. Maoouche, "Meanshift clustering based trend analysis distance for fault diagnosis," in *Systems, Man, and Cybernetics (SMC), 2013 IEEE International Conference on*. IEEE, 2013, pp. 1877–1882.
- [23] F. Lebourgeois, F. Drira, D. Gaceb, and J. Duong, "Fast integral meanshift: Application to color segmentation of document images," in *Document Analysis and Recognition (ICDAR), 2013 12th International Conference on*. IEEE, 2013, pp. 52–56.
- [24] T. Ryu, P. Wang, and S.-H. Lee, "Image compression with meanshift based inverse colorization," in *Consumer Electronics (ICCE), 2013 IEEE International Conference on*. IEEE, 2013, pp. 330–331.
- [25] X. Zhao, S. Guo, and Y. Wang, "The node influence analysis in social networks based on structural holes and degree centrality," in *Computational Science and Engineering (CSE) and Embedded and Ubiquitous Computing (EUC), 2017 IEEE International Conference on*, vol. 1. IEEE, 2017, pp. 708–711.
- [26] M.-J. Park, S.-H. Lee, O.-M. Kwon, J. H. Park, and S.-G. Choi, "Betweenness centrality-based consensus protocol for second-order multi-agent systems with sampled-data," *IEEE transactions on cybernetics*, 2017.
- [27] H. Kim and K. P. Kim, "Formulating closeness centralities on workflow-supported performer-activity affiliation networks," in *Advanced Communication Technology (ICACT), 2017 19th International Conference on*. IEEE, 2017, pp. 960–965.
- [28] R. M. Awangga, S. F. Pane, K. Tunnisa, and I. S. Suwardi, "K means clustering and meanshift analysis for grouping the data of coal term in puslitbang tekmlira," *Telkomnika*, vol. 16, no. 3, 2018.

National Border Agency Communication Behaviour Clustering Using Centrality and Meanshift

ORIGINALITY REPORT

13%

SIMILARITY INDEX

11%

INTERNET SOURCES

9%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	pdfs.semanticscholar.org Internet Source	2%
2	otech.uaeh.edu.mx Internet Source	2%
3	qspace.qu.edu.qa Internet Source	2%
4	Yun-lin Wang. "Social Physics and China's Population Migration", Lecture Notes of the Institute for Computer Sciences Social Informatics and Telecommunications Engineering, 2009 Publication	1%
5	Ubaidillah Umar, Helmy Widyantara, Billy Montolalu, M. Muhsin. "Implementation of Semantic Web on Wireless Sensor Application for Environment Monitoring", 2019 International Conference on Electrical, Electronics and Information Engineering (ICEEIE), 2019 Publication	1%

6	zenodo.org Internet Source	1 %
7	opamss.org.sv Internet Source	1 %
8	Peter Dahlin, Pankaj C. Patel. "Joined by remoteness: An exploratory comparison of regional board networks in Sweden", <i>Global Networks</i> , 2021 Publication	1 %
9	journals.scholarpublishing.org Internet Source	<1 %
10	www.ncbi.nlm.nih.gov Internet Source	<1 %
11	www.physics.ohio-state.edu Internet Source	<1 %
12	kidsdiaries.co.uk Internet Source	<1 %
13	Rolly Maulana Awangga, Muhammad Yusril, Helmi Setyawan. "Ontology Design of Influential People Identification Using Centrality", <i>Journal of Physics: Conference Series</i> , 2018 Publication	<1 %
14	journal.ugm.ac.id Internet Source	<1 %

15 umrah.ac.id

Internet Source

<1 %

16 Muhammad Ruslan Maulani, Syafrial Fachri Pane, Rolly Maulana Awangga, Diana Asri Wijayanti, Wahyu Caesarendra. "An Analysis of Customer Agrotourism Resort Behaviour based on RFM and Mean Shift Clustering", 2018 International Conference on Applied Engineering (ICAE), 2018

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On

National Border Agency Communication Behaviour Clustering Using Centrality and Meanshift

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/0

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5
